PoolCotiSA **Astral Pumps**

Sena - Self Priming

1800 Series - Single Voltage 115Volts


The 1800 series Sena pumps provide high flow performance for both the in-ground and above ground market. The pumps come pre-wired for 115 volt for easy plug in use. Units also features 1 1/2" PVC threaded unions for hoses adapters. Manufactured of high impact, heat resistant fiberglass filled polymers; this self-priming pump is very quiet and easy to service. The 1800 series Sena pumps are available in 3/4, 1, and 1.5 HP with single or dual speed 115 volt motors.


- Pre-wired with 3' cord for 115 volt easy plug installation.
- Glass reinforced body for long life and maximum durability.
- · Strainer has clear lid with lock ring closure for easy access.
- · Self-priming for In-ground or above ground pools.
- · Easy service design gives access to all internal components.
- · All Stainless nuts and bolts.
- · Stainless steel motor shaft.
- 1 1/2" PVC threaded unions for easy installation and service.
- NORYL impeller.
- · Motor Shroud and on/off switch on "SEC" models.

* Add \$5.00 on list price for 3' twist lock plug.

NOTE: Please add a "T" to end of part number for twist lock.

Pumps Also Available with motor cover shroud, meets Canadian outdoor requirements.

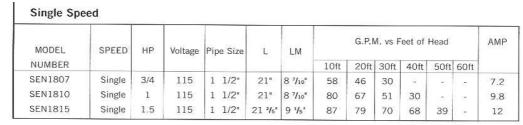

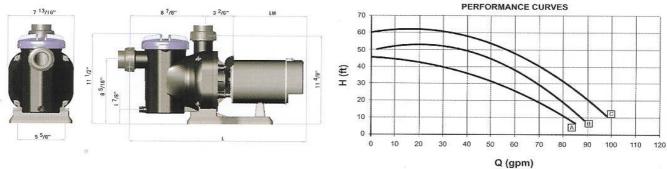

SELF PRIMING


COMPLETE

CORD

WITH 115 VOLT

Reference	List Price	Standard Carton	Carton Weight (lbs.)	Carton Volume (ft^3)
SEN1807	298.00	1	27	2.6
SEN1810	309.00	1	28	2.6
SEN1815	329.00	1	31	2.6


PoolCo HAYWARD Pumps

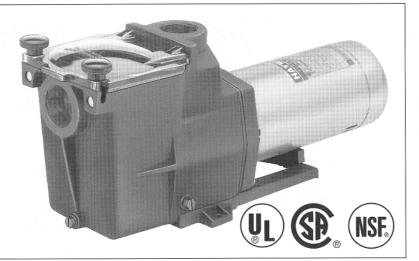

Super Pump®

HIGH PERFORMANCE PUMP

Overall Dimensions




SP2610X15 11/2 H.P. Super Pump

r Pump. Super H	Super Pump							
Model No.	H.P.	Voltage	Pipe Size	Dim "A"	Price			
Single Speed								
SP2605X7	3⁄4	115/230	1 1/2"	10 5/8"	622.00			
SP2607X10	1	115/230	1 1/2"	11"	680.00			
SP2610X15	1 1/2	115/230	1 1/2"	12 1/8"	733.00			
SP2615X20	2	115/230	2	13 1/8"	885.00			
		Speed	Dual					
SP2607X102S	1	230	1 1/2"	13 5/8"	940.00			
SP2610X152S	1 1/2	230	1 1/2"	14 1/8"	995.00			
SP2615X202S	2	230	2	15 1/8"	1,035.00			
Dual speed pumps	s with "S	S" designati	ion are comp	lete with "H	li/Lo"switch.			



Power-Flo® Matrix™

ABOVE-GROUND PUMP SERIES



Power-Flo Matrix								
Model No.	H.P.	Voltage	Pipe Size	Price				
SP1591	3⁄4	115	1 ¹ /2"	405.00				
SP1592	1	115	1 1/2"	418.00				
SP1593	1 1/2	115	1 ¹ /2"	436.00				

competition

Magnum Force

2" Unions included.

-1/16




Jacuzzi

- Patented air-cooled heat sink allows pump to run dry without damage to shaft seal. UNCONDITIONAL TWO-YEAR WARRANTY AGAINST SEAL FAILURE.
- Exclusive dual Ring-Lok[™] design gives "tool free" access to strainer basket and pump internals.
- 208 cu. in. heavy-duty strainer basket with exclusive priming tube for superior priming capabilities.




- Exclusive flap prevents debris in the pump strainer, skimmer basket and filter from flowing back into the pool. The flap also prevents residual hot water in the heater from flowing into filter and causing damage
- Internal ribs in large strainer basket assure flow, even
- when filled with leaves and debris.
- One-piece case eliminates bolts and gaskets and provides for quiet operation.
- Flexible connections 2" FNPT or 2" unions (included).
- Floating eye seal between closed impeller and diffuser maximizes efficiency.
- Maximum water temperature 104° F.
- Energy saver motors (1/2 hp 3 hp) are standard on single speed units.

Performance




S



NUMF








Dimensions

Magnum Force- Single Speed- Energy Saver- Unity Service Factor							
Model	HP	Voltage	Service Factor	Price			
7UMF-S	3/4	115/230	1	630.00			
1UMF-S	1	115/230	1.25	680.00			
15UMF-S	1 1/2	115/230	1.1	720.00			
2UMF-S	2	115/230	1.1	840.00			
25UMF-S2	2 1/2	230	1.04	1.020.00			
3UMF-S	3	230	Full Rated	1,195.00			





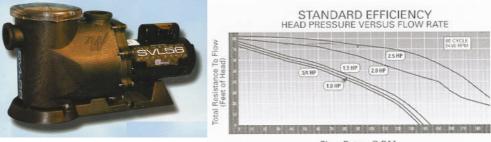

Flow Rate - G.P.M.

Waterway takes pride in introducing its new flagship in-

ground premium pump in a class of its own. The extraordinary quietness of the SVL56 moves us nearer to the goal of silent operation, and it provides by far the best vertical lift. A true 56 frame motor ensures long

life and uninterrupted power. Attention to detail is evident in the design of this all-new pump. Designed for easy serviceability and installation, the pump accepts either 2" or 2 $\frac{1}{2}$ " plumbing connections and features dual bearings for cooler operating temperature. This pump will provide years of trouble-free performance. Compare this special promotional price with that of "Northstar".

FEATURES


- Quiet operation.
- · High efficiency.
- · Self-primina
- Best vertical lift at 24 ft.
- · Easy to service.
- True 56 frame motor for cooler running and longer life.
- 21/2" union threads x 2" FPT with unions (included).
- · Large trap basket with cam-lock lid.
- 60 Hz rating.


SLV56 In-Ground Pool Pump- Standard Efficiency- Maximum Rated									
Part No.	Description	Volts	H.P.	WT. (lbs.)	Price				
SVL56S-107	1 Speed- 2" or 2 1/2" Ports	115/230	.75	38	688.00				
SVL56S-110	1 Speed- 2" or 2 1/2" Ports	115/230	1.0	40	729.00				
SVL56S-115	1 Speed- 2" or 2 1/2" Ports	115/230	1.5	44	769.00				
SVL56S-120	1 Speed- 2" or 2 1/2" Ports	230	2	46	889.00				
SVL56S-125	1 Speed- 2" or 2 1/2" Ports	230	2.5	48	1,050.00				



FEATURES

- •2" Buttress / 11/2" NPT threads on suction and discharge.
- · Powerful side discharge performance.
- . Wet end can be rotated for easy installation.
- · Large trap with one piece lid.
- · High head capability.






The Hi-Flo Above ground pump was designed for superior and efficient performance and features high flow performance for faster filtering cycles. This pump is ideal for new systems or as a replacement pump.

Hi-Flo Side Discharge 48 Frame Pump & Trap								
Part No.	Description	Volts	H.P.	WT. (lbs.)	Price			
PH1075-6	1 Speed- 6ft. NEMA cord	115	.75	26	360.00			
PH1100-6S	1 Speed- 6ft. NEMA cord	115	1.0	30	380.00			
PH1150-6S	1 Speed- 6ft. NEMA cord	115	1.5	33	407.00			
PH1200-6	1 Speed- 6ft. NEMA cord	115	2.0	35	485.00			

PoolCo Waterway Pumps



The last addition to the Waterway Pump line, the Champion High Performance Pump is compatible with all cleaning systems, various filters, and jet action spas. The Champion is ideal for new installations and as a replacement pump due to the dimensions of this pump. Compare this special Promotional price with that of "Whisper Flow".

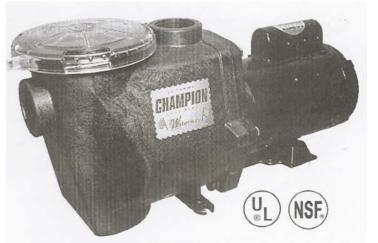



The Champion In-Ground Pool Pump- Standard Efficiency- Maximum Rated							
Part No.	Description	Volts	H.P.	Price			
Champs-107	1 Speed- 2" intake and discharge	115/230	.75	580.00			
Champs-110	1 Speed- 2" intake and discharge	115/230	1.0	630.00			
Champs-115	1 Speed- 2" intake and discharge	115/230	1.5	670.00			
Champs-120	1 Speed- 2" intake and discharge	230	2.0	760.00			
Champs-125	1 Speed- 2" intake and discharge	230	2.5	830.00			
Champs-130	1 Speed- 2" intake and discharge	230	3.0	980.00			

Pump comes with 2 - 2" union connections


FEATURES:

- Quiet operation.
- High efficiency.
- Self-priming.
- 2" FPT intake and discharge.
- · Easy to service.
- True 56 frame motor for cooler running and longer life.
- Large trap basket with cam-lock lid.
- 60 Hz rating.





1-SPEED



SUBMERSIBLE PUMPS



Water V	Vizard® Submersible	Pumps
Item No.	Description	Price
505025	Water Wizard- 1/6HP	186.00

30

25

20 AD - FEET

15

Ų

FLOW - LITERS/HOUR 2000

500 1000 FLOW - GALLONS/HOUR

4000

9.0

8.0

7.0 6.0

5.0

4.0

3.0 2.0

1.0

0.0

1500

"Your Solution Innovator"

Includes garden hose adapter and removable inlet screen for easy cleaning. Lifetime oil supply. Pumps down to 1/8" (3.2 mm.).

Fluid Systems Design Parameters

- Motor 1/6HP Shaded Pole
- Maximum flow rate 1200 GPH @ 1', 4542 LPH @ 30 cm.
- Maximum Head 26.3'...8 m
- Intermittent Liquid Temp to 120° F....49° C
- Discharge 1"FNPT (25.4 mm)
- Housing Epoxy coated cast aluminum
- Volute Nylon
- Impeller Nylon
- Shaft Seal Viton®
- Shaft Stainless Steel
- **Operation Manual**
- Electrical 115V, 60Hz, 5 amps, 25' (7.6m) power cord



02540

ST015

Little Giant [®] Automatic Pool Cover Pumps							
Item No.		Description	Price				
APCP1700		Pool Cover Pump ¹ / ₃ HP	280.00				
AF	СР	-1700 Series Features:					
	•	Activates in Approximately 2" of water					
	•	3/4" MNPT Garden Hose adapater					
	•	Maximum Flow of 1700 GPH @ 1"					
•		Unique Design for needed stability					
	•	Mechanical float for dependability					
	•	Cord length of 25'					

Superior Submersible Utility Pumps										
Model		Gallo	Gallons per minute at discharge height in feet Min. Min.							
No.	HP	0'	5'	10'	15'	20'	25'	Lift	Amps	Price
SP91025	1/5	26	21	14	10	7	1	25'	3.6	125.00
SP91330	1/3	40	34	28	22	12	2	25'	4.1	180.00



91025 & 91330

• 1/5 & 1/3 HP motors, 120 v, 60 Hz Superior Specifications: • Corrosion resistant construction.

Super Siphon- Weighted Siphon for A/G Pools

- 8' waterproof power cord.
- · Clog resistant open type impeller.
- · Capacities of 26 & 40 gpm.



35.00

Misc. A/G Pumps	
Cover Care- Clog resistant pool cover pump	60.00



PoolCottSA Air blowers and Vacuums

	High Performance Air Blowers	
Part No.	Description	Price
6318120	Silencer- 2Hp. 120v 9.0 amps, 3 Stage!	298.00
3218120	Comet 2000- 2Hp. 120v 9.0 amps, 3 Stage!	200.00
4128100	Cyclone- 3Hp! 120v 3stage! 14.0 amps	600.00
HB-429-12	Duralast- 2Hp. 240v Single Phase	2,395.00
3018120	Replacement motor- 2Hp. 120v 9 amps, 3 Stage!	160.00
3018220	Replacement motor- 2Hp. 240v 4.5 amps, 3 Stage!	166.00



of the Future, Inc.

New Model Cyclone















	Liner Vacuums				
Part No.	Description	Price			
	Q-Vac- with suction hose	825.00			
3027530	Cyclone- <u>3Hp!</u> 120v <u>3stage!</u> 14.0 amps	600.00			



Strong performer. Quiet leader.

The Max-E-Pro[™] Pumps are Sta-Rite's premier pumps and are featured in many showcase pool installations. They didn't get there by chance. Pool professionals prefer the Max-E-Pro[™] Pumps for their powerful, efficient performance and extremely quiet operation.



Max-E Pro® Pumps Energy Efficient Full-Rated Models							
Part No.	Description	Volts	H.P.	Price			
P6E6D-205L	³ / ₄ HP Max-E Pro Pump, 2" Port Size	115/230	3/4	910.00			
P6E6E-206L	1HP Max-E Pro Pump, 2" Port Size	115/230	1	980.00			
P6E6F-207L	1 ¹ / ₂ HP Max-E Pro Pump, 2" Port Size	230	11/2	1,065.00			
P6E6G-208L	2HP Max-E Pro Pump, 2" Port Size	230	2	1,270.00			
P6E6H-209L	3HP Max-E Pro Pump, 2" Port Size	230	3	1530.00			

Max-E Pro	While supplies last			
Part No.	Description	Volts	H.P.	Price
P6RA6E-205L	1HP Max-E Pro Pump, 2" Port Size	115/230	1	880.00
P6RA6F-206L	1 ¹ / ₂ HP Max-E Pro Pump, 2" Port Size	115/230	11/2	960.00
P6RA6G-207L	2HP Max-E Pro Pump, 2" Port Size	230	2	1,030.00

Dura-Glas® Pumps While supplies last								
Part No.	Description Volts H.P.							
P2RA5D-180L	³ /4HP Dura-Glas Pump, 1.5" Port Size	115/230	3/4	740.00				
P2RA5E-181L	1HP Dura-Glas Pump, 1.5" Port Size	115/230	1	800.00				
P2RA5F-182L	1 ¹ / ₂ HP Dura-Glas Pump, 1.5" Port Size	115/230	11/2	865.00				
P4A6G-188L	2HP Dura-Glas Pump	230	2	985.00				



A time-tested classic

Dura-Glas[®] Pumps changed the pool industry over 30 years ago when they were introduced as the first thermoplastic swimming pool pumps. And, with their proven track record, the Dura-Glas[®] Pumps are featured in many of the finest pool installations.



Best In Class!

AquaPRO Systems is very proud to announce the launch of our Eco-Apex[™] Series of professional pool pumps, designed by the pool professional for the pool professional. This innovative line of pool pumps will be the answer you are looking for, providing powerful, high efficiency, quiet operation for your customer, with EZ-Access features you'll love!

- High Efficiency Motors Deliver Maximum Energy Savings and "Best In Class" Hydraulic Performance
- EZ-Access Tool-Less Design For Fast Assessment
- Rugged, Glass-Filled, Reinforced Thermoplastic Construction for Long Life
- EZ-View Quick-Lock Lid Makes Cleaning a Snap!

Pool/Spa Pump Features



- 2" NPT FEMALE, 3" NPT MALE SUCTION INLET

- HIGH EFFICIENCY DIFFUSER FOR QUIET OPERATION
- FLOATING WEAR RING FOR EXTENDED DRY RUN PROTECTION

HIGH EFFICIENCY MOTORS DELIVER MAXIMUM ENERGY SAVINGS - HI-MOUNT DESIGN KEEPS MOTOR DRY AND CLEAN - QUICK CHANGE VOLTAGE (DUAL VOLTAGE MODELS ONLY)

- EZ-ACCESS TOOL-LESS DESIGN FOR FAST ASSESSMENT
- 2" NPT FEMALE TOP DISCHARGE
- EZ-VIEW QUICK-LOCK LID MAKES CLEANING A SNAP

- ECO-APEX XL-MAX FILTER BASKET DESIGNED TO EXCEED NSF STANDARDS


RUGGED, GLASS-FILLED, REINFORCED THERMOPLASTIC CONSTRUCTION FOR LONG LIFE

MECHANICAL SEAL DESIGNED WITH PREMIUM RESIN IMPREGNATED CARBON, ROTATING AGAINST A SILICONE CARBIDE SEAT WITH VITON®* ELASTOMERS TO DELIVER EXCEPTIONAL CHEMICAL RESISTANCE


universally compatible NPT SETUP FOR HASSLE-FREE INSTALLATION AND REPAIRS setting a new standard for the industry!




Performance You Can See!



	HP	Volts	Amps	SF	Sh. Wt.	Pallet Qty.
FULL RATE MODELS						
A - APB075PRO	3/4	115/208-230V	11.0/5.9/5.5	1.65	46 bs.	
B - APB100PRO	1	115/208-230V	14.0/7.6/7.0	1.65	48 bs.	
C - APB150PRO	1.5	208-230V	9.6/8.8	1.50	51 lbs.	6
D - APB200PRO	2	208-230V	11.0/10.0	1.30	52 lbs.	
E - APB300PRO	3	208-230V	14.7/13.4	1.15	54 lbs.	
UPRATED MODELS						
AU - APB100UPRO	1	115/208-230V	11.0/5.9/5.5	1.24	46 Bs.	
BU - APB150UPRO	1.5	115/208-230V	14.0/7.6/7.0	1.10	48 lbs,	1
cu - APB200UPRO	2	208/230V	9.6/8.8	1.13	51 lbs.	6
DU - APB250UPRO	2.5	208/230V	11.0/10.0	1.04	52 lbs.	





Part No.	Description	H.P.	Price
APB100UPRO	Up-rated Extreme Service Pump	1	680.00
APB150UPRO	Up-rated Extreme Service Pump	1 1/2	735.00
APB200UPRO	Up-rated Extreme Service Pump	2	850.00
APB250UPRO	Up-rated Extreme Service Pump	2 1/2	935.00
APB300PRO	Full-rated Extreme Service Pump	3	1180.00
APBVSPIGGY	Special perm. magnet extreme super	1	1280.00
	efficient 3 speed motor, approx.,220, 520,		
	1200 watt speeds! E-Mod type motor.		

W.COOPER INC.



CHECKOUT THE RANGER SERIES SAND FILTER QUALITY!

- ✓ One-Piece Moulded Tank Guarantees a Long Tank Life.
- ✓ Stainless Steel Fittings for Corrosion-free Performance.
- ✓ Large Drain Port for Quick Winterizing and Draining.
- ✓ Unique Drain Port Strainer which is Efficient and Durable.
- ✓ 6-Position Top Mount 1 ¹/₂" Selector Valve for Easy Retrofits.
- ✓ Synthetic V-clamp Guarantees 100% Seal of Selector Valve to the Tank.
- Exclusive Hub Assembly Design that is Stronger than Glued Assemblies.
- ✓ Patent Pending Laterals are 360° Slotted, One-Piece Twist Lock Design.
- ✓ Laterals are a full 1.5" Outside Diameter for full flow with Little Back Pressure.

Model #	Description	Sand Required (lbs.)	Price
RS2115 RS2515 RS2520 RS3020 RS3620	21" Ranger Sand Filter w/ 1 ½" Valve25" Ranger Sand Filter w/ 1 ½" Valve25" Ranger Sand Filter w 2" Valve30" Ranger Sand Filter w/ 2" Valve36" Ranger Sand Filter w/ 2" Valve	200 300 300 500 650	445.00 495.00 595.00 830.00 1,030.00

In-Ground D.E. Filters Astral DE Filters



Clarity D.E. Filters


Our heavy duty filter tank is a unique combination of fiberglass lamination with a molded polyester resin, offering unsurpassed strength to resist high pressures and the rigors of infloor cleaning systems. The filter easily assembles/disassembles with a sturdy stainless steel band and sits atop a molded plastic base.

The internal manifold is injection molded ABS and features a curved grid design for maximum space efficiency. Filter connections are 2" standard to handle the modern pool's higher flow rates. Filters include air relief valve and pressure gauge. Filters available in 24, 36, 48 and 60 square foot filter area models.

Description	Reference	Price List	Standard Carton	Carton Weight (lbs.)	Carton Volume (Ft^2)
24 Sq. Ft 2 Connections	18044	800.00	1	75	15.5
36 Sq. Ft 2 Connections	18045	870.00	1	86	17.7
48 Sq. Ft 2 Connections	18046	940.00	1	97	19.8
60 Sq. Ft 2 Connections	18047	999.00	1	106	21.9

All models are usually stocked – See next page for valves.

MODEL NUMBER	HEIGHT (H)	WIDE (D)	м	С	Ν	OVERHEAD CLEARANCE	FILTER AREA (Sq.ft)	FLOW RATE (G.P.M.)	WORKING PRESSURE (PSI)	VALVE	MEDIA Ibs
18044	355/16"	24"	1516/16"	9"	67/8"	37"	24	48	50	2"	3
18045	37¾"	24"	1515/16"	9"	61/8"	51"	36	72	50	2"	5
18046	435/16"	24"	1515/16"	9"	67⁄8"	67"	48	96	50	2"	7
18047	4.93/16"	24"	15 ¹⁵ /16 ¹¹	9"	6 ⁷ /8"	74"	60	120	50	2"	9

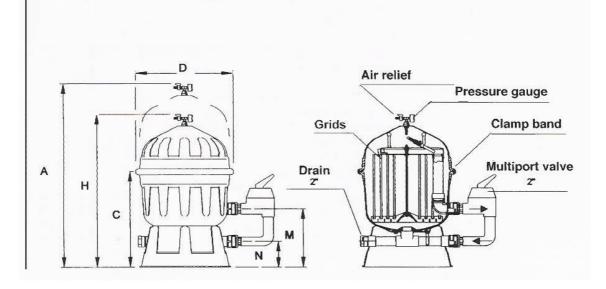

PoolCo SA NSE Astral Multi-Port Valves

Multiport Valves

100 Series Multiport Valve

- No Bolts for easy service
- 7 position multiport valve.
- Top or side mounted.
- Body, lid and handle injected in ABS.
- Bayonet lid catch.
- Security clip in lip.
- •"Winter" position.
- Working pressure 50 PSI.

100

• Sight glass.





Description	Reference	Price List	Standard Carton	Carton Weight (lbs.)	Carton Volume (Ft^2)
Top Mount 1 1/2"	22358	130.00	6	31	2.8
Side Mount 1 ¹ /2"	22355	140.00	6	31	2.8



Multiport Side Valve

With six function selections and integral sight glass. Side inlet, bottom outlet.

Valve only, without plumbing.

Side Mount 1 ¹ /2"	22356	140.00	6	27	2.8
Side Mount 2"	30795	200.00	6	44	5.6





Multiport Valve

Featuring seven position selections and sight glass. Side inlet, bottom outlet. Complete with influent connection, 90° elbow effluent connection and union nuts.

For 3000 Series Filters

2"-for 30" SM	09848	200.00	1	9	1.4
2" -for 24" SM	28226	200.00	-	-	-
2 1/2" -for 36" SM	24840	650.00	1	21	3.0
2" -for DE SM	18676	200.00	1	9	1.1





S244T Pro Series 24" filter with 1 ½" Vari-Flo™ control valve.



DE3620 Pro-Grid filter with 2-position slide valve.

Pro Series Top-Mount Sand Filter

Model No.	Valve	Sand Required	Price
S220T	1 ¹ / ₂ " Vari-Flo	250 lbs.	532.00
S244T	1 ¹ / ₂ " Vari-Flo	300 lbs.	546.00
S310T2	2" Vari-Flo	500 lbs.	998.00



Performance Data - Filter

Model	Effective Filtration			nover allons)	
Number	Area	Flow Rate*	8 Hours	10 Hours	
S220T	2.64 ft. ²	52 GPM	24,960	31,200	
S244T	3.14 ft. ²	62 GPM	29,760	37,200	
S310T2	4.91 ft. ²	98 GPM	47,040	58,800	

*Based on 20 GPM/ft.² (maximum allowable NSF rating).

Pro-Grid D.E. Filter

Model No.	Effective Filtration Area	D.E. Required	Price
DE2420	24 Sq. ft.	3 lbs.	940.00
DE3620	36 Sq. ft.	41 /2 lbs.	1,040.00
DE4820	48 Sq. ft.	6 lbs.	1,140.00
DE6020	60 Sq. ft.	7 ½ lbs.	1,295.00
DE7220	72 Sq. ft.	9 lbs.	1,650.00

** All filters include pressure gauge, air relief valve, and 1 ¹/2" drain plug.

Performance Data – Valve Positions

Model Number	Filter	Back- wash		Recirc- ulate		Closed	Winter
SP0714T	•	•	•	٠	•	•	•
SP071621	•	•	•	٠	•	•	-

Popular Valve Selections For Hayward**

Model No.	Description	Pipe Size	Valve Positions	Price
SP0710XR50	Vari-Flo/DE SM	1 ½" FIP	6	158.00
SP0710X32	S200 & S240 Sand SM	1 1/2"	6	158.00
SP0710X62	Pro Series Sand SM	1 ¹ /2"	6	158.00
SP0715XR50	Vari-Flo/DE SM	2" FIP	6	235.00
SP0710XALL	Universal Valve	1 ½" FIP	6	130.00
SP07121	Thd. Top Mount f/GM	1 ½" FIP	6	148.00
SP0714T1	Top Mount Sand	1 ½" FIP	6	140.00
SP0715XALL	Universal Valve	2" FIP	6	175.00

<u>**Please refer to pages 15-17 in this section for Praher Multi-Port Valve selections</u> to fit most filter applications including above filters at a lower cost.

PoolCous



Features

- 16", 19", 22.5" and 25" models.
- NEW! Upper distribution system integrated into the dial valve and engineered to direct water evenly across the entire surface of the sand - up to 25 gpm/sg.ft. without sand migration or channeling.
- Underdrain with side-slotted laterals draws water evenly across the full diameter of the sand bed for higher flows, better filtration, longer cycles and more efficient backwashing. Features heavy-duty, freeze resistant hub and easy service, snap-fit laterals.
- Deep, high-capacity sand bed carries more debris and extends filter cycles.
- Blow-molded tank is corrosion-resistant, and UV-resistant.
- Bottom drain for winterizing and draining.
- NEW! Non-Corrosive Resin Clamp for simple installation and service of dial valve and filter components.
- 7-way Dial Valve with sight glass, automatic air relief, and pressure gauge. The 7 functions include:




Filter Backwash Rinse Whirlpool Drain

Performance

Model	Size	sq.ft.	6 Hrs.	8 Hrs.	Sand	Work Press
L160C-7	16"	1.33	12,000	16,000	140 lbs.	35 psi
L192C-7	19"	1.87	16,800	22,400	200 lbs.	50 psi
L225C-7	22-1/2"	2.64	23,800	31,700	250 lbs.	50 psi
L250C-7	25"	3.30	29,700	39,600	350 lbs.	50 psi
						1000000



Dimensions



MODEL	A	В	C	D	E
L160C-7	26-1/4"	28-3/4"	33"	16"	13"
L192C-7	30"	32-1/2"	36-3/4"	19"	12-1/2"
L225C-7	30-3/4"	33-1/4"	37-1/2"	22-1/2"	11-1/2"
L250C-7	34"	36-1/2"	40-3/4"	25"	13-1/2"

Model	Description	Price
*L160C-7	16" Laser Sand Filter with 7-Way Dial Valve	420.00
L192C-7	19" Laser Sand Filter with 7-Way Dial Valve	480.00
L225C-7	22 ¹ ⁄ ₂ " Laser Sand Filter with 7-Way Dial Valve	540.00
L250C-7	25" Laser Sand Filter with 7-Way Dial Valve	560.00
S15 UNSKIT	Union for DVK7	16.00

* Non stocked items

We also have Jacuzzi 15" 85# sand filters in limited supply with 4 way valves @ 200.00







Features

- The SandStorm features a corrosion resistant and ultra violet resistant, precision molded one piece tank. The 26" (66 cm) SandStorm handles up to 75 GPM (17 m³/h; the 31" (78,7 cm) SandStorm handles up to 96 GPM (22 m³/h); the 36" (91,4 cm) SandStorm handles commercial flows up to 140 GPM (32 m³/h) and residential flows up to 175 GPM (40 m³/h).
- Spherical tank design for superior strength, longer life.
- Stainless steel clamp allows for 360° rotation of the dial valve for easy installation.
- 2" plumbing for less flow restriction.
- · Sturdy injection molded base for secure tank support.
- 7-way dial valve controls filter, backwash, rinse, drain, whirlpool, winterize, and test operations. The 2" (51 mm) valve features large waterways for better flow.




- UniFlo underdrain with unique side-slotted laterals. TM31 and TM36 models feature exclusive snowflake lateral system which optimizes use of sand bed on larger filters.
- · Easy service "Snap-Fit" laterals.
- · Heavy-duty, freeze resistant hub.
- Water distribution system features unique diverter and basket to direct water evenly across the entire surface of the sand without sand migration or channeling.



Snowflake lateral design Conception passage latéraux flocon de neige

Dimensions

NSF



		Residental Su	rface résidentiel	Comp	nercial	
MODEL NO. MODĖLE nº.	SQ. FT. Pl² (m²)	6 HRS 6 HEURES GALLONS (m ²)	8 HRS 8 HEURES	6 HRS 6 HEURES GALLONS (m ²)	8 HRS 8 HEURES	SAND SABLE LBS (KG)
TM26	3.75 (0,35)	33 750 (128)	45 000 (170)	27 000 (102)	36 000 (136)	350 (158,8
TM31	4.80 (0,45)	43 200 (164)	57 600 (218)	34 560 (131)	46 080 (174)	500 (226,8
TM36	7.05 (0.65)	63 450 (240)	84 600 (320)	50 760 (192)	67 680 (256)	800 (362.9)

Note:

1). Commercial flow rate - 20 GPM/sq.ft. (49 m3/h / m2) NSF listed.

2). Residential flow rate - 25GPM/sq.ft. (61 m³/h / m³) max. filtration rate, not NSF listed.

3) Recommended #20 silica sand (0.40 mm to 0.55 mm effective size)

o). necommended	#20 Silica Saliu	10,40 mm 10	0,55 mm enecu	VE SIZEL	

**Model	Description	Price
TM26-7	26" SandStorm Filter with 2" 7-Way Dial Valve	740.00
TM31-7	31" SandStorm Filter with 2" 7-Way Dial Valve	969.00
TM36-7	36" SandStorm Filter with 2" 7-Way Dial Valve	1,560.00

****Limited Inventory – call on availability.**

PoolCo USA

competition

Dial Valves

Features

(Jacuzzi

- DVK-4: Bolt-on 1-1/2" 4-way valve featuring FILTER, BACKWASH, DRAIN, and WHIRLPOOL.
- DVK-6: Bolt-on 1-1/2" 6-way valve featuring FILTER, BACKWASH, RINSE, DRAIN, WHIRLPOOL and TEST.
- DVK-7C: Clamp-style 1-1/2" 7-way valve featuring FILTER, BACKWASH, RINSE, DRAIN, WHIRLPOOL, TEST, and WINTERIZE.
- DVK-7: Bolt-on 1-1/2" 7-way valve featuring FILTER, BACKWASH, RINSE, DRAIN, WHIRLPOOL, TEST, and WINTERIZE.
- 2DVK-C7: Clamp-style 2" 7-way valve featuring FILTER, BACKWASH, RINSE, DRAIN, WHIRLPOOL, TEST, and WINTERIZE.
- All dial valves feature automatic air relief.
- All dial valves include pressure gauge.
- All dial valves can now be set in a winterize position.
- DVK-6, DVK-7C, DVK-7 and 2DVK-C7 include sight glass for backwash.
- DVK-6, DVK-7C and DVK-7 feature optional union connections.
- DVK-7 and DVK-7C are completely serviceable without disturbing plumbing.





DVK-4

DVK-7





2DVK-C7

DVK-6



DVK-7C

Dial Valve & Unions						
**Model	Description	Price				
DVK-4	4- Position Dial Valve, 1 ¹ /2"	110.00				
DVK-7C	7- Position, Clamp style valve 1 ¹ /2"	150.00				
DVK-7	7- Position Bolt-on valve 1 ¹ /2"	150.00				
2DVK-7C	7- Position, Clamp on Valve, 2"	220.00				
DVK-6	6- Position Dial Valve, 1 ¹ /2"	150.00				
DVK-7/ DVK-5	7- Position Dial Valve Replacement for DV5	130.00				
S15UNS-KIT	Unions for DVK-7, DVK-7C, DVK-6	16.00				
2UNST	Unions for 2DVK-C7	20.00				

**Above valves in limited supply – check Praher section on pages 15-17

Above Ground Sand Filter

Complete the sand filtration system with the high performance Waterway Hi-Flo Pump and accessories. The Sand filter and pump pack provides homeowners with everything they need

Clearwater Above Ground Sand Filter & Supreme Pump Pack							
Part No.	Filter	Dia.	Filtration	Flow Rate	Pump	HP.	Price
FSS01910-6S	FS019	19"	2.0 Sq. Ft.	45 GPM	PH2100-6	1.0	680.00
FSS01915-6S	FS019	19"	2.0 Sq. Ft.	45 GPM	PH2150-6	1.5	708.00
FSS02210-6S	FS022	22"	2.6 Sq. Ft.	55 GPM	PH2100-6	1.0	720.00
FSS02215-6S	FS022	22"	2.6 Sq. Ft.	55 GPM	PH2150-6	1.5	760.00
FSS02615-6S	FS026	26"	3.5 Sq. Ft.	70 GPM	PH2150-6	1.5	820.00


to get their system up and running. It assures them of matched components and optimal performance with years of dependable service.

FEATURES

- Large filtration sand filter with durable, high flow laterals.
- Top of the line Hi-Flo High Performance Pump
- Large 6" trap with clear lid.
- Union connection on multi-port for easy installation.
- A gate valve to isolate the system for maintenance.
- (2) 11/2" diameter hoses, with clamps.
- Filter and pump mounting bases and additional accessory base for chlorinator and timer.

SYSTEMS INCLUDE:

- 2 hoses (1½" x 6 ft.).
- Hose fittings, hose clamps.
- 3 ft. cord twist lock plug, or 6 ft. cord NEMA plug.
- Deluxe modular filter and
- pump bases.
- Modular accessory base.
 (See page 20.)
- A gate valve to isolate the system for maintenance.





Timers					
Part No.	Description	Price			
PA060	Pump Timer with Stand- NEMA (Reg.)	98.00			
	Cord				
CCT01206	Timer (NEMA) & off-line chlorinator in				
	Plain Box	179.00			
CLBT01206	Timer (NEMA) & in-line chlorinator with				
	adapter in plain box	194.00			

PoolCotisA Clearwater **Way.** Cartridge Filters

Large filtration, small footprint, and high flow; Clearwater Cartridge Filters incorporate wide-body filtration elements to give maximum filtration without sacrificing flow rate. Made of a durable glass-filled polymer, Clearwater cartridge

filters provide years of trouble-free performance. Clearwater Cartridge Filters feature Waterway's Safety lock ring system to ensure safe operation and easy maintenance.

FEATURES

- · Wide-body filtration system.
- Durable glass-filled polymer filter body.
- 10 year warranty on filter body.
- 11/2" clean out drain on 11/2" FPT 2" on 2" FPT.
- Pressure gauge.
- · Air relief plug.
- · Automatic air bleed capability.
- · Lid handle.

	 1½" FPT model has an internal check valve in outlet. 						
Clearwater Cartridge Filter							
Part No.	Area	Flow Rate	Pool Turnover 6-8 hours	WT. (lbs.)	Price		
FC075	75 Sq. Ft.	75 GPM	27,000-36,000	31	390.00		
FC100	100 Sq. Ft.	100 GPM	36,000-48,000	36	490.00		
FC125	125 Sq. Ft.	125 GPM	45,000-60,000	37	525.00		
FC150	150 Sq. Ft.	150 GPM	54,000-72,000	44	660.00		
FC200	200 Sq. Ft.	200 GPM	54,000-72,000	46	750.00		



Complete the Cartridge filtration system with the high performance Waterway Hi-flo Pump and accessories. The Cartridge Filter and pump pack provides homeowners with everything they need to get their system up and running. It assures them of matched components and optimal performance with years of dependable service.


Clearwater Cartridge Filter with Pump System							
Part No.	Filter	Area	Pump	H.P.	Volts	Price	
FCS075107-6S	FC075	75 Sq. Ft.	PH2100-6R	1.0	115	690.00	
FCS100107-6S	FC100	100 Sq. Ft.	PH2100-6R	1.0	115	785.00	
FCS150107-6S	FC150	150 Sq. Ft.	PH2150-6R	1.5	115	899.00	
FCS200107-6S	FC200	200 Sq. Ft.	PH2200-6R	1.5	115	990.00	


FEATURES

w/

- Large filtration, small footprint cartridge filter.
- Top of the line Hi-Flo High Performance Pump.
- · Large 6" trap with clear lid.
- · A gate valve to isolate the system for maintenance
- (2) 11/2" diameter hoses, with clamps.
- Filter and pump mounting bases, and additional
 - accessory base for chlorinator and timer.

System includes: 2 hoses (1 ¹/₂" x 6'), hose fittings, hose clamps, 6ft cord NEMA plug, deluxe modular filter, and pump bases, & a gate valve to isolate system for maintenance.





PoolCo USA Clearwater DE Filter II




True spiral laminar flow in an above

ground filter, spiral laminar flow ensures even distribution of DE for maximum filtration. The Clearwater DE filter features automatic regeneration. Waterway's Safety Lock Ring system for safe operation and mainten ance, and a ten year warranty on its rugged glass-filled polymer body.

FEATURES:

- · True Spiral Laminar flow for even disbursement of D.E.
- · Automatic hydraulic regeneration
- · High flow rate
- Modular grid system for easy maintenance
- 1 1/2" drain port on 1 1/2" FPT
- · Flush-mounted pressure gauge
- Low-profile air relief plug
- Automatic air bleed capability
- · Heavy-duty lid handle



	Clearwater DE Filter II						
Part No.AreaFlow RatePool TurnoverWT.6-8 hours(lbs.)							
FD12-7	12 Sq. Ft.	44 GPM	15,840-21,120	34	440.00		
FD18-7	18 Sq. Ft.	67 GPM	24,120-32,160	41	540.00		



Complete the DE filtration system with the high performance Waterway Hi-Flo Pump and accessories. The DE filter and pump pack provides homeowners with everything they need to get their system up and running. It assures them of matched components and optimal performance with years of dependable service.

Clearwater DE Filter II with Pump System							
Part No.	Filter	Area	Pump	H.P.	Volt	Price	
					S		
FDS044107-6S	FD12-7	44 Sq. Ft.	PSP1100-6R	1.0	115	780.00	
FDS067107-6S	FD18-7	67 Sq. Ft.	PSP1100-6R	1.0	115	890.00	
FDS067107-6S	FD18-7	67 Sq. Ft.	PSP1150-6R	1.5	115	1,080.00	

NEMA plug, deluxe modular filter and pump base, modular accessory base, a gate valve System include: 2 hoses ($1 \frac{1}{2}$ " x 6ft), hose fittings, hose clamps, 6 ft. cord with to isolate system for maintenance.

PoolCo USA Crystal Water Filters

Crystal Water DE Filter						
Part No.	Description	Flow Rate	Pool Turnover 6-8 hours	WT. (lbs.)	Price	
570-0036	36 Sq. Ft.	72 GPM	25,920 - 34,560	70	850.00	
570-0048	48 Sq. Ft.	96 GPM	34,560 - 46,080	80	980.00	
570-0060	60 Sq. Ft.	120GPM	43,200 - 57,600	90	1,135.00	

DE Filter Accessories					
Part No.	Description	Price			
600-1500	2 ¹ /2" Hi Temp PVC Slide Valve- 2" reducers incl.	110.00			
550-4280	Adapter fitting package	35.00			
WVD001	2" Multi-port valve with union connections	200.00			

Designed for today's most demanding installations, the Crystal Water D.E. Filter sets a new standard of performance and features for pool filters. The only D. E.

CROD Sw5

Filter on the market with 2 ¹/2" internal piping, improves flow and reduces system noise when using 2 ¹/2", 2", or 1 ¹/2" plumbing. From the lid with the "Multi-handle" design to the 2" bottom clean out port, the Crystal Water D.E. Filter will provide years of trouble-free operation and crystal clear, sparkling water.

- FEATURES
- 2'/2" internal piping.
- Accepts 2¹/₂", 2" and 1¹/₂" plumbing. (Fittings incl.)
 Fiberglass reinforced polypropylene body for superi-
- or strength.
- "Multi-Handle" design.
- Heavy-duty tamper-proof clamp.
- Industry proven D.E. grids.
- "Start-Service" dial on pressure relief gauge.
- 2" bottom clean-out port.
- 21/2" hi-temp PVC slide valve available.
- · Convertible to cartridge by simply changing internals.

Crystal Water Cartridge Filter						
Part No.	Description	Flow	Pool Turnover	WT.	Price	
		Rate	6-8 hours	(lbs.)		
570-0325	325 Sq. Ft.	120 GPM	43,200 - 57,600	70	1,040.00	
570-0425	425 Sq. Ft.	150 GPM	54,000 - 72,000	80	1,250.00	
570-0525	525 Sq. Ft.	150 GPM	54,000 - 72,000	90	1,460.00	

Combining high technology features and an easy to service design, the Crystal Water Cartridge Filter is ideal for new and replacement installations. The only cartridge filter on the market with 2 ¹/₂" internal piping, improves flow and reduces system noise when using 2 ¹/₂", 2", or 1 ¹/₂" plumbing. Using four cartridge elements, the Crystal Water Cartridge Filter offers a superior choice for easy maintenance and crystal clear, clean water.








For replacement parts, see page 113.

FEATURES

- 21/2" internal piping.
- Accepts 2¹/₂", 2" and 1¹/₂" plumbing. (Fittings incl.)
 Fiberglass reinforced polypropylene body for
- superior strength.
- "Multi-Handle" design.
- Heavy-duty tamper-proof clamp with removal tool.
- Industry proven cartridge elements.
- "Start-Service" dial on pressure relief gauge.
- •2" bottom clean-out port.
- Convertible to D.E. by simply changing internals.





In-Ground Sand Filter

	Carefree Sand Filter							
Part No.	Description	Filtration	Flow	F	ool Turno	ver	Price	
			Rate	6 hours	8 hours	10 hours		
FS01619	16" Dia. Filter w/ modular	1.4 Sq. Ft.	35	12,600	16,800	21,000	395.00	
Non-Stocked	base & 1.5" FTP valve		GPM					
FS01922	19" Dia. Filter w/ modular	2.0 Sq. Ft.	45	16,200	21,600	27,000	440.00	
	base & 1.5" FTP valve		GPM					
FS02225	22" Dia. Filter w/ modular	2.6 Sq. Ft.	55	19,800	26,400	33,000	490.00	
	base & 1.5" FTP valve		GPM					
FS02629	26" Dia. Filter w/ modular	3.5 Sq. Ft.	70	25,200	33,600	42,000	550.00	
	base & 1.5" FTP valve	-	GPM					

FEATURES:

- Large filter with extra sand-holding capacity.
- One-piece corrosion proof body.
- Fine-spray internal diffuser for even water distribution.
- 7-function, thread-on, top-mount 1½" FPT Multi-Port Valve.
- 11/2" drain port.
- Mounting base included.

Carefree Top-Mount Sand Filters are designed for extra sand holding capacity, made of Corrosion-proof polymeric thermoplastic. The Carefree Sand Filter offers the ideal combination of energy efficiency and excellent water clarity.





Style

Top Mount Sand Filter Valves						
Part No.	Description	WT. (lbs.)	Price			
WVS002	Top mount 7-function	5	110.00			
	Filter Valve Collar Style					
WVS003	Top mount 7-function	5	110.00			
	Filter Valve w/ Split Nut					

FEATURES

Durable ABS body.
7 functions:

- 1. Filter
- 2. Waste
- 3. Backwash
- 4. Recirculate
- 5. Winterize
 6. Rinse
 7. Closed
 Retrofits standard sand filter bodies. Case Qty. 1

POOLCOUSA Sand Filters Pentair



Cristal-Flo[™]



Triton II®



Sand Dollar®

Model	Description	Price
T200BP1	20" Cristal-Flo 2.2 Sq. Ft., 1.5" inlet, 150 lb.	575.00
T240BP1	24" Cristal-Flo 3.1 Sq. Ft., 1.5" inlet, 300 lb.	680.00
T300BP2	30" Cristal-Flo 4.9 Sq. Ft., 2" inlet, 600 lb.	1,070.00
140264	TR 60 TritonII 3.14 Sq. Ft., 325 lb. sand	790.00
140315	TR 100 4.91 Sq. Ft., 600 lb. sand	1.340.00
140316	TR 140 7.06 Sq. Ft., 925 lb. sand	1,950.00
SD60	22" Diameter 60 GPM 250 lb. Sand	520.00
SD80	24" Diameter 80 GPM 300 lb. Sand	570.00
	VALVES FOR TRITON FILTERS	
261165	2" PVC Slide Valve f/Sand & DE filters	110.00
261173	1 ¹ /2" Side Mount Multiport Valve	160.00
261055	2" Side Mount Multiport Valve	245.00

Cristal-Flo™

Features

- * Typical Installations Inground pools and water features (including fish ponds and water gardens)
- Quality Construction Durable one-piece extra-thick molded polyethylene tank
- Safe Internal air relief hole allows air to automatically escape, preventing high pressure buildup
- 6-Position Valve Allows you to perform all necessary water movement functions. A transparent sight-glass adapter is included
- More Choices Both 20" and 24" available with multi-functional 6- Position Valves.
- · Large Drain Plug Large drain plug is easy to get at for removing and installing by hand or with tools if required
- Sleek Looks Contemporary style with a textured black finish that provides superior performance in all weather conditions

Triton®II Features

- Heavy-duty closure provides easy inspection, and features an easy-to-read pressure gauge with air relief valve
- Swing-away diffuser allows instant access to sand and all internal parts
- All internal parts are threaded for ease of service
- Internal air bleed
- Bulkhead connectors are threaded for easy installation and service
- Combination sand and water drain makes servicing and winterizing fast and easy
- Maximum Operating Pressure 50 psi



TOP MOUNT MULTIPORT VALVES

Size	Model #	Description	Price
1 1/2"	TM-12-A	6" UNC Thread (Fine V-Thread)	130.00
1 1/2"	ТМ-12-В	6" Buttress Thread (Course V-Thread)	130.00
1 ¹ /2"	ТМ-12-Е	Bolt Down 8 Bolts (7-11)	130.00
1 1/2"	TM-12-S	Clamp Down 7.5" Clamp Flange (American)	130.00
1 1/2"	TM-12-S8	Clamp Down 8.22" Clamp Flange (American)	130.00
1 1/2"	ТМ-12-Н8	Clamp Down 8" Clamp Flange (SP711-13)	130.00
1 1/2"	TM-12-L	Clamp Down 8.25" Clamp Flange	130.00
1 1/2"	TM-12-JL	Bolt Down 6 Bolts Laser Filter (NEW ITEM)	130.00
1 1/2"	TM-12-PB	5.98" Buttress Thread	130.00
1 1/2"	TM-12-CFC	Clamp Down 6.5" Clamp Flange	130.00
1 1/2"	ТМ-12-9ВН	Clamp Down 9" Clamp Flange	130.00
2"	TM-22-L	Clamp Down 8.25" Clamp Flange	180.00
2"	TM-22-JAC	7 1/16" Buttress Thread	180.00
2"	ТМ-22-РВ	Clamp Down 8.22" Clamp Flange	180.00
2"	ТМ-22-Е	Bolt Down 8 Bolts	180.00
2"	ТМ-22-РА	Clamp Down 8.22" Clamp Flange w/o Diffuser Basket	180.00
2"	ТМ-22-Н8	Clamp Down 8" Clamp Flange (SP716-21)	180.00
	12L-CLP	Clamp Ring Including Hardware (<u>Fits Top</u> Mounted L-Style Flange)	20.00







SIDE MOUNT MULTIPORT VALVES



PRE-PLUMBED MPVs FOR SAND FILTERS

Size	Model #	Description	Price
1 ¹ /2"	SM1-HP3	SM-10-3 W Hayward Plumbing (5" Centers) 1.5" FIP	150.00
1 ¹ /2"	SM1-HPX62	SM-10-3 W Hayward Plumbing F. Pro Series – 6" Centers	150.00
2"	SM2-HP3	SM 20-3 W/Hayward (5" Centers) 2" FIP	225.00
		(6" Center to Center Plumbing)	
1 ¹ /2"	SM1-PP3	SM-10-3 W/Pac Fab Plumbing, 1 ½" FIP	165.00
2"	SM2-PP3	SM-20-3 W/Pac Fab Plumbing 2" FIP	225.00
2"	SM2-HPX62	SM-20-3 W/Hayward Plumbing 2"FIP, Pro Series 6" Center	225.00

PRE-PLUMBED MPVs FOR D.E. FILTERS



1 1/2"	SM1-HP2	SM10-2 W/Hayward Plumbing 5" Center, 1 ¹ / ₂ " FIP	150.00
2"	SM2-HPXR50	SM20-2 W/Hayward Plumbing 5" Center, 2" FIP	225.00
2"	SM2-HPXR50S	SM20-2 W/Hayward Plumbing 5" Center, 2" Socket	225.00
1 1/2"	SM1-PP21	SM10-2 W/Pac Fab Plumbing 1.5" FIP-FNS 4800 Discontinued, Replaced with SM1-PP2	
1 1/2"	SM1-PP2	SM10-2 W/Pac Fab Plumbing 1.5" FIP	150.00
2"	SM2-PP2	SM20-2 W/Pac Fab Plumbing 2" FIP	225.00



SIDE MOUNT MPVs w/out Piping

1 ¹ /2"	SM-10-AO	All Ports Open (FIP)	115.00
2"	SM-20-AO	All Ports Open (FIP)	145.00
1 ¹ /2"	SM-10-AOS	All Ports Open (Socket)	115.00
2"	SM-20-AOS	All Ports Open (Socket)	145.00

PoolCotsA

PRAHER VALVES

TOP MOUNT MULTIPORT VALVES CONVERSION CHART BY OEM

(contraction	Τανκ	STYLE	VALVE	PRAHER VALVE #
Totally Havward		Clamp On	SP0711-13	ТМ-12-Н8
	S180T2-S244T2	Clamp On	SP0714T	ТМ-12-Н8
\sim		Thread On	SP07122	TM-12-A
	S160T	Thread On	SP07121	ТМ-12-В
	S310T,S360T	Clamp On	SP071621	ТМ-22-Н8
<u>JACUZZI</u>				
	SPLASH-prv.label	Clamp On Valve	Splash	ТМ-12-Н8
JACUZZI.	Laser	Bolt On Valve	DVK-4,6	TM-12-JL
	Laser II	Clamp On Valve	DVK-7	ТМ-12-Н8
	Sand Storm 31	Clamp On Valve	DVK-C7	ТМ-22-Н8
	ST-33,ST-27	Screw Down	2VK-33	TM-22-JAC
	30RMT,36FP	8 Bolts Bolt Down	42-1693-80	ТМ-22-Е
	42SP,48SP		42-1693-80	ТМ-22-Е
STA-RITE				
	Cristal-Flo	Clamp On	WC112-148 (A)	TM-12-L
STA-RITE	Panterra	8-Bolt Flange	14962-0105	ТМ-12-Е
	Waterford Systems	Clamp On	JSAL-01/03	TM-12-L
Simply Smarter.			JSAL-02-04	TM-12-L
			WC112-148	TM-12-L
			14971-TM-22L	TM-22-L
WATERCO				
Water, the liquid of life	T450,500,600	Thread On		TM-12-PB
Water, the liquid of life	, ,	Bolt On 12 Bolts		TM-22-L
JANDY				
Jandy	ST24-T,ST18-T	Thread On	A0102200	ТМ-12-В
Juncy	SF30-T,SF32-T,SF36-T	Bolt On 12 Bolts	A0102300	TM-22-LA
V.Cooper	,			
	Rangers Series	Clamp On		TM-12-L
W.COOPER INC.	Also Private Label	Clamp On Clamp On		TM-12-L TM-22-L
MERICAN				1 111-22-12
NL NCAN		Classic	501121	TIM 10 G
Pentair	22" Eclipse, Meteor 26",30" Eclipse	Clamp On Clamp On	501131 501130	TM-12-S
	30" Eclipse	Clamp On Clamp On	501130	TM-12-S8 TM-22-S8
	50" Ecupse	Clamp On	501251	111-22-58
POOLCO				
HIGH END POOLS		Bolt On 8 Bolts		ТМ-12-Е
		Clamp Down		TM-12-L
PAC FAB				
	TA-Series Prior '91	Screw Down		TM-12-A
Pentair	TA-Series After '91	Screw Down		TM-12-PB
	TA-D Series	Clamp Down		TM12-CFC*
	TA-100D	Clamp Down		TM22-PB
KER HYD	RO			
11/4	W3 909,910,922	Screw Down		ТМ-12-В
	Baker II	Clamp Down	30B0056	TM-12-9BH